MountStand - Wall

Art. DID100.100.000












Technical Drawing

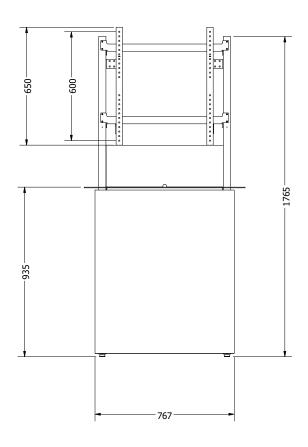





SPECIAL WARNING

INSTALLATION AND SERVICE MUST BE PERFORMED BY A QUALIFIED INSTALLER. READ AND SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

UNPACKING YOUR PRODUCT

Remove all packing materials from the product carefully. Handle this product with care. Be careful when cutting the packaging to avoid damaging the product.

MPORTANT NOTES TO THE INSTALLER

Keep this manual for future reference.

- Always handle this product with two people (> 25kg)
- This product should only be installed and grounded properly by a qualified installer or service technician.

TOOLS

Powerdril, inbus, installation tape, tyraps









FIXING MATERIALS

M4x10, M6x16

Additional products



MountStand - Wall

Art. DID100.100.000

www.dekkerindustrialdesign.nl/product/mountstand-wall/





MountStand - Floorplate

Art. DID100.200.000

www.dekkerindustrialdesign.nl /product/mountstand-double-screen/





MountStand - Double

Art. DID100.300.000

www.dekkerindustrialdesign.nl /product/mountstand-double-screen/





MountStand - Mobile

Art. DID100.600.000

www.dekkerindustrialdesign.nl/product/mountstand-mobile/





MountStand - Backplate

Art. DID100.700.000

www.dekkerindustrialdesign.nl/product/mountstand-backplates/





45 min

Plug and Play Delivery


Art. DID110.000.000

www.dekkerindustrialdesign.nl /product/mountstand-plug-and-play/




Install the intermediate beams

- 1. Mount the two intermediate beams with the supplied M6x16 hexagon socket screws
- 2. Mount the installation grille with the four supplied M6x16 hexagon socket screws

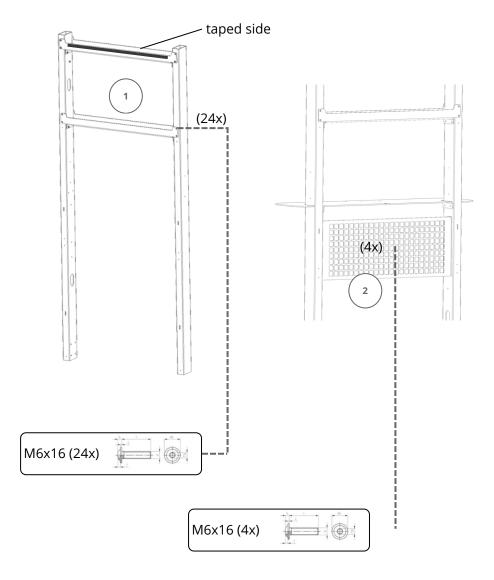


Handle the cabling

3. Now mount all your cabling and AV devices behind the screen and on the installation grid

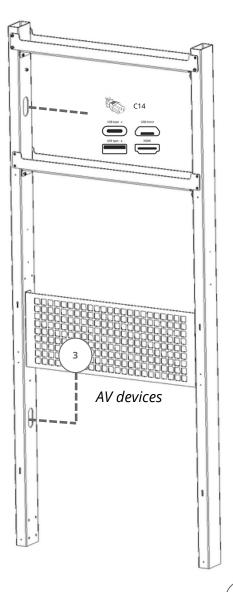


Install Shelf

4. Mount the shelf to the MountStand with the 4x M6x16 bolts. Install also the videobar on the shelf and connect the cabling

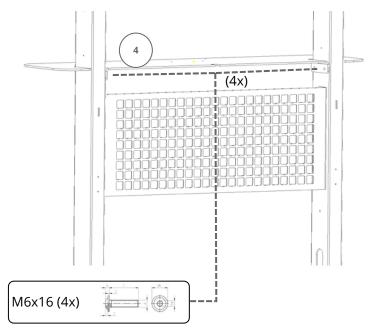


5. Install the leveling feet under the MountStand

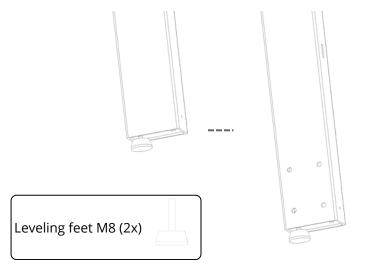


Install the Wallmount brackets

6. Install the back plate (cover) behind the video bar above the shelf. Mount these against the side beams with the supplied M4x10 screws.

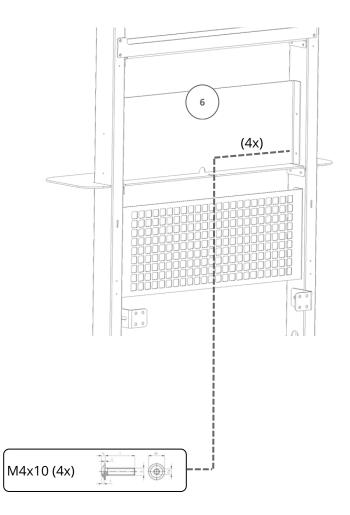

Install the MountStand - Wall


7. Install the entire MountStand against the wall (skip this step for floorstand or mobile solution). Mount the 4 MountBracket brackets using wall plugs. Always check the strength of the wall. *Wall plugs and screws not included*

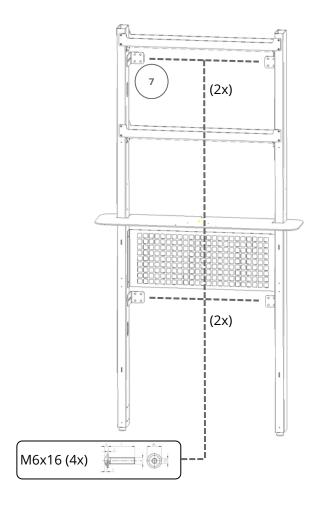

Wall plugs and screws not included


Handle the VESA brackets

8. Mount the two VESA brackets on the screen. First check the correct height

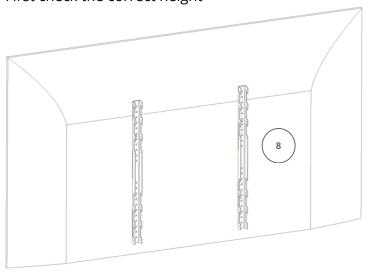


<u>Screws are not supplied as standard</u> (These are often supplied with the monitor)

9. Mount the two lock pins with the M3, washers and M3

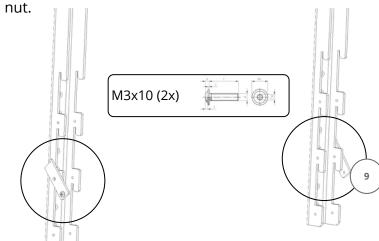

Install the monitor

10. Now hang the screen with the VESA brackets on the cross beams. Attach the lock pins and also tighten the M4 bolts.

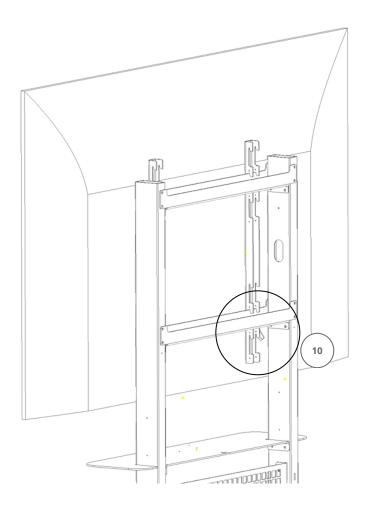

11. Connect the cabling to the monitor and tyrap them to the middle beam.

Place the frontcover

12. Place the front cover with the top slots in the slots of the vertical tubes. And click the bottom magnets against the vertical tubes.

